

Installation & Operations Manual John Deere Gator Hitch Receiver

John Deere Gator is a registered trademark of John Deere and has no affiliation with Seizmik Products, Kartaccessories.com, or Vialink Corp.




Seizmik makes Hitch Receivers, Hood Racks, Brush Guards, and other great accessories for utility vehicles. Our Hitch Receivers are engineered tough for long life and tested under the harshest of conditions. Always observe the warnings and precautions in this manual when using your Seizmik products. For best results, carefully follow the instructions in this manual and make no modifications.

Seizmik products are designed, developed, and manufactured by Vialink Corp. If you have any questions, comments, need assistance, or are missing parts, please call 1-866-888-3366 xt.110 between 9:00AM and 5:00PM EST. Or email us at info@kartaccessories.com.

Seizmik Front Hitch Receiver Kit Contents:

- A. ½” – 13 x 1.75 Hex Bolt (4)
- B. Front Hitch Receiver (1)

- C. ½” Flat Washer (8)
- D. ½” – 13 Lock Nut (4)

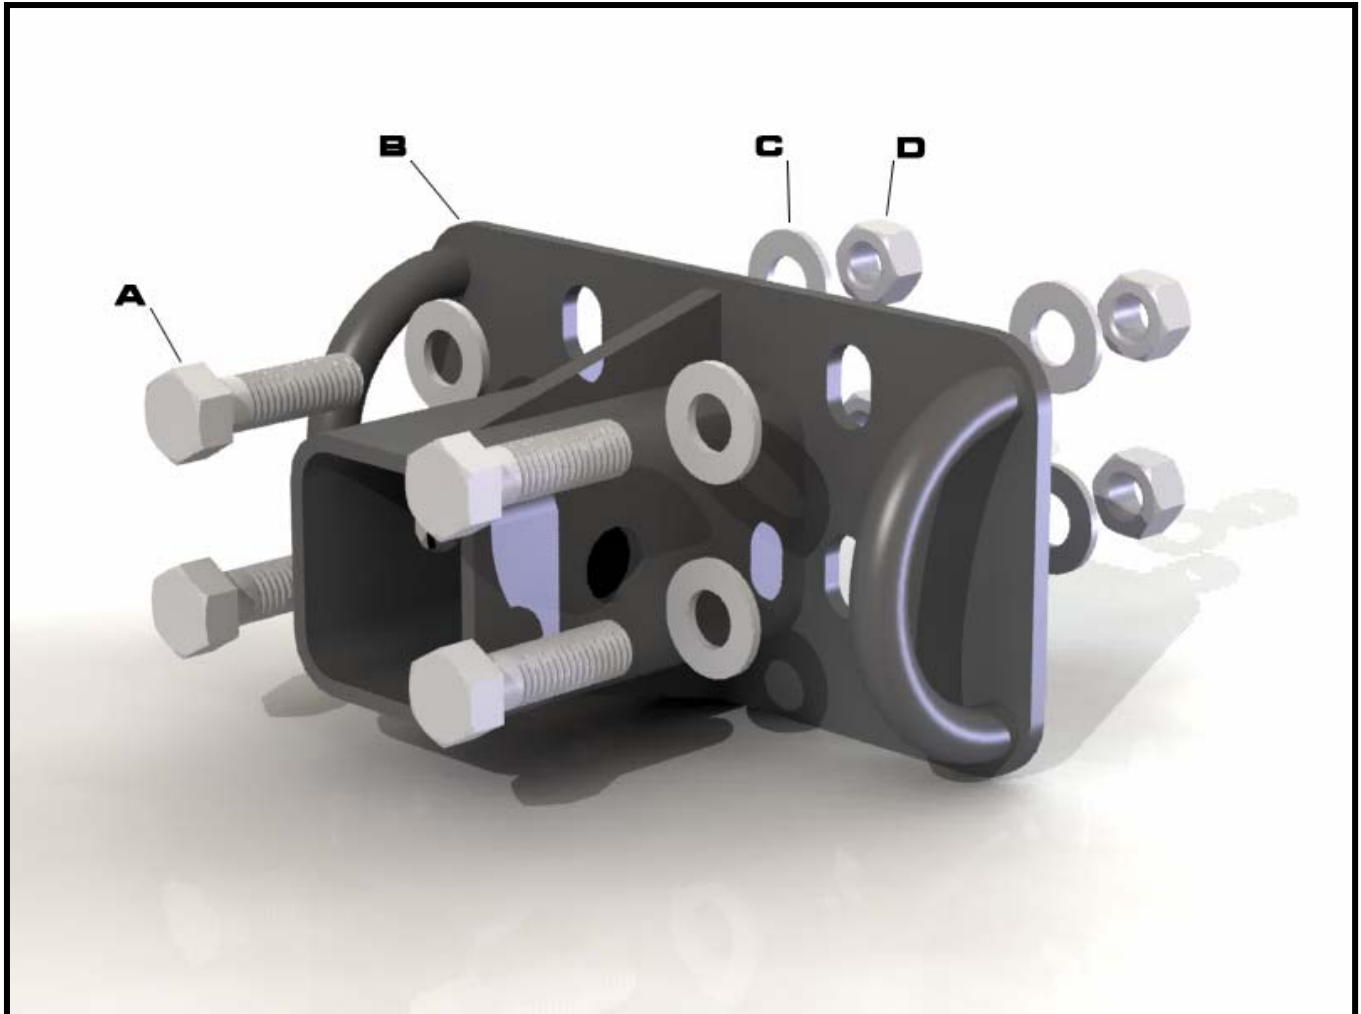

Kit Contents Diagram:

Recommended tools:

- Mechanics socket set

Installation Instructions:

1. **Install Hitch Receiver** – position the hitch receiver (B) over the existing bolt holes in the HPX front bumper. Align the holes and install the provided ½-13 x 1.75 bolts (A), washers(C), and lock-nuts (D) as shown in Figure 1. Tighten all hardware securely.

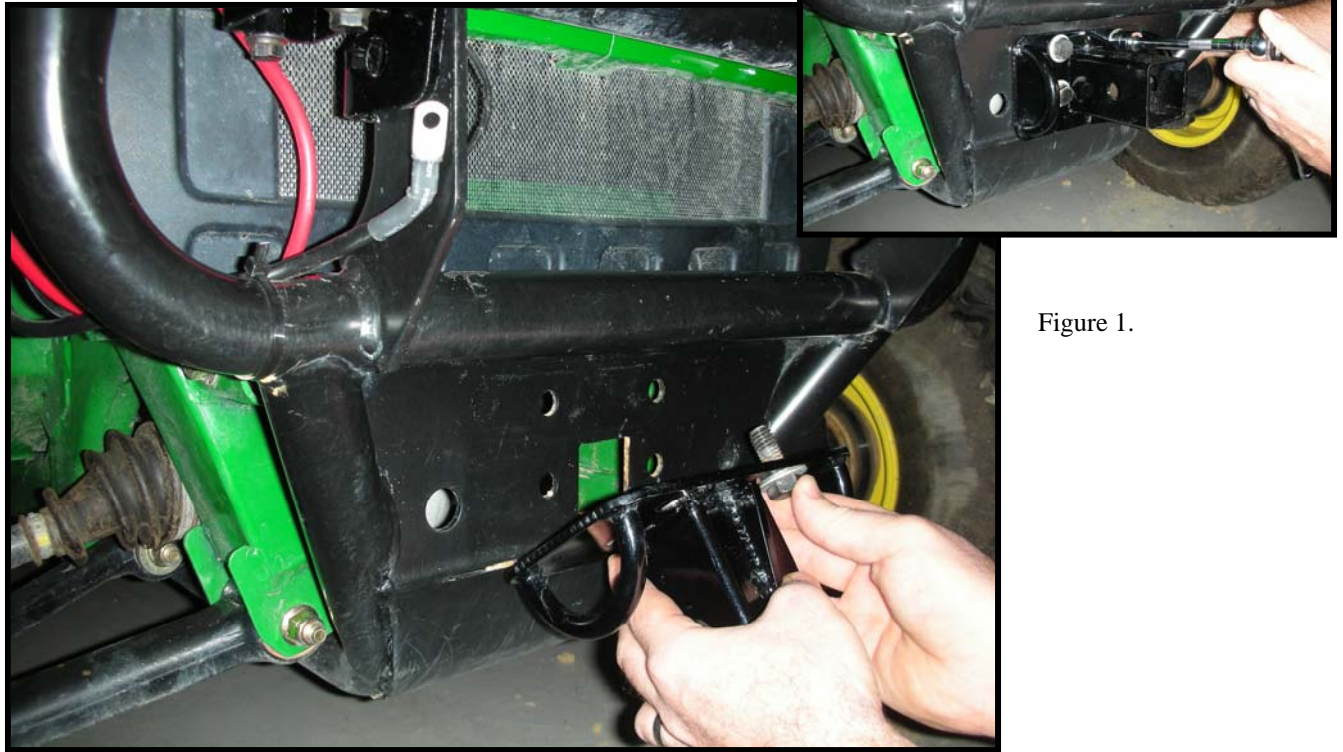


Figure 1.

2. **You're Finished!** –Congratulations! Enjoy your Seizmik Front Hitch Receiver and don't forget about other great Seizmik accessories for your Gator! Visit www.kartaccessories.com to order the full line of Gator accessories.

Alternate Installation Instructions:

- 1. Install the Hitch Receiver** – If your Gator is fitted with the Seizmik Winch Mount, follow these mounting instructions. Have a friend help you hold the winch mount in position and remove the mounting hardware. Position the hitch receiver (B) over the existing bolt holes in the HPX front bumper and align the holes with the bumper and hitch receiver mounting holes. Install the provided $\frac{1}{2}$ -13 x 1.75 bolts (A), washers(C), and lock-nuts (D) as shown in Figure 2. Tighten all hardware securely.

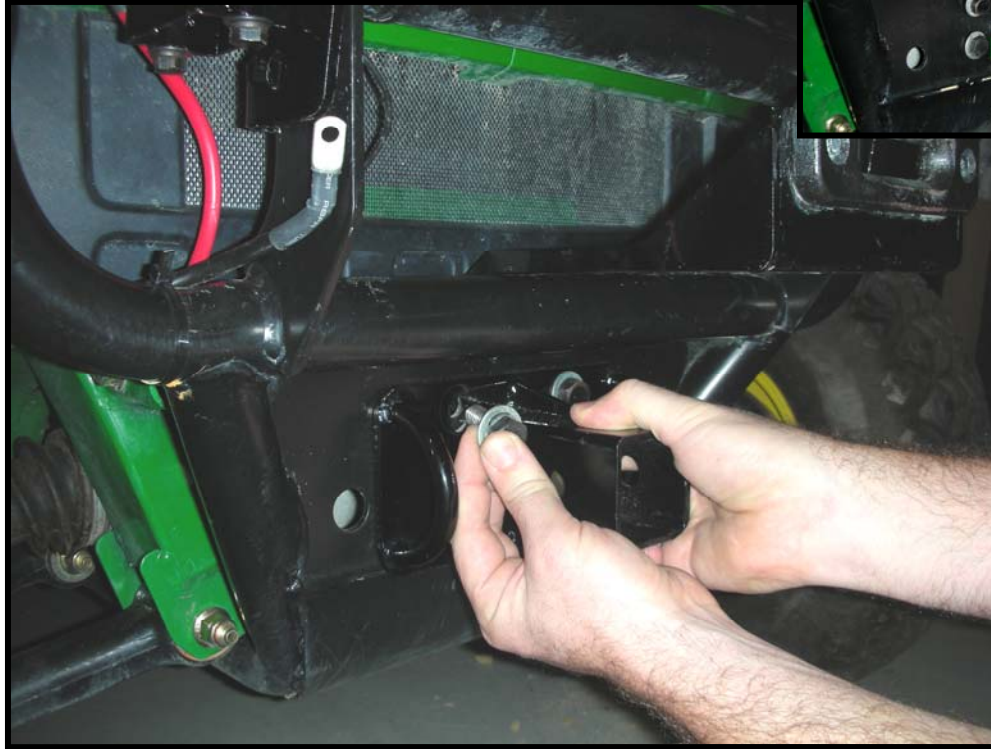


Figure 2.

- 2. You're Finished!** –Congratulations! Enjoy your Seizmik Front Hitch Receiver and don't forget about other great Seizmik accessories for your Gator! Visit www.kartaccessories.com to order the full line of Gator accessories.



Safety Information: Please follow all warnings and precautions for safe operation.

- The maximum tongue weight that can be supported by your Seizmik Hitch Receiver is 80 lbs. Overloading may cause serious injury or death.
- Your vehicle may handle differently with a load on the hitch receiver. Do not exceed 10 mph with a front attachment.
- ALWAYS follow all precautions and warnings from the manufacturer of your vehicle

Seizmik products are designed, developed, and manufactured by Vialink Corp. If you have any questions, comments, need assistance, or are missing parts, please call 1-866-888-3366 xt.110 between 9:00AM and 5:00PM EST. Or email us at info@kartaccessories.com.