


Installation & Operations Manual Kubota RTV X Full Vented Windshield



Kit Contents:

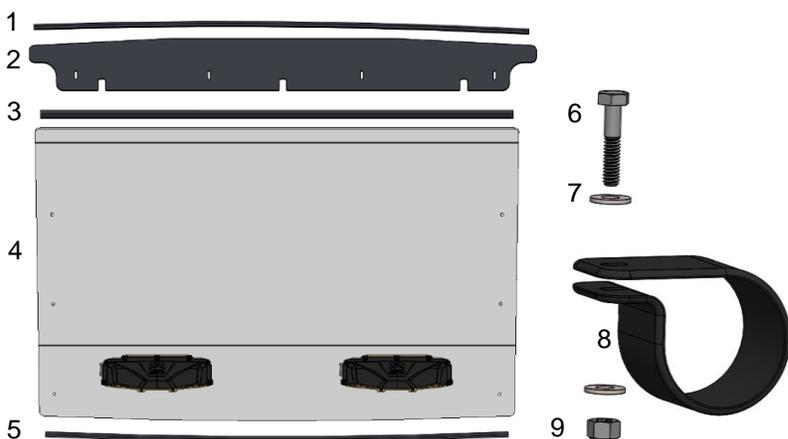

- | | |
|----------------------------|----------------------------|
| 1. Bulb Gasket (53 Inches) | 6. 1/4 20 x 1.25 Bolt (10) |
| 2. Header Panel | 7. 1/4 Washer (20) |
| 3. Bulb Gasket (51 Inches) | 8. Plastic P clamp (10) |
| 4. Windshield with Vents | 10 1/4 20 Locknut (10) |
| 5. Bulb Gasket (46 Inches) | |

Installation Information:

This product does not require any modifications to your vehicle. Please familiarize yourself with all the steps before beginning assembly.

Compatibility Info:

This windshield is designed to work with other Seizmik branded Accessories for the Kubota RTV-X as well as the Kubota . Please note Seizmik cannot guarantee fitment with other branded aftermarket products. Please research installation details on our products and others when trying to combine different branded accessories.


Seizmik makes Windshields, Mirrors, Door Kits, Light Bars, Hood Racks, and other great accessories for UTV's to maximize the vehicles usefulness. To help you do what you do better.

If you have any questions, comments, need assistance, or are missing parts, please call 1-866-838-3366 between 9:00AM and 5:00PM EST. Or email us at service@seizmik.com. Visit www.seizmik.com for more information on our products.


Installation:



1. Peel plastic 4" back on all sides of windshield. Remove completely after windshield is fully installed.

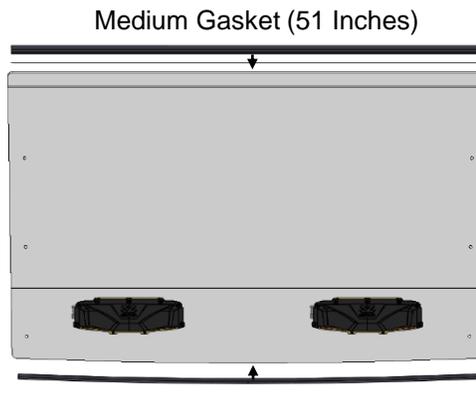


2. Push the gasket on the top and bottom of the windshield as well as the long curved surface of the header panel.

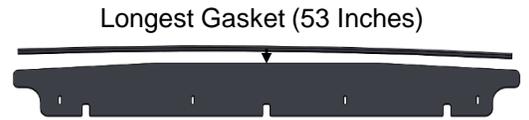

Shortest Gasket (46 Inches)



3. Bolt the Header panel in front of the upper cross bar in on the RTV X with 4 plastic p clamps bolts and washers.

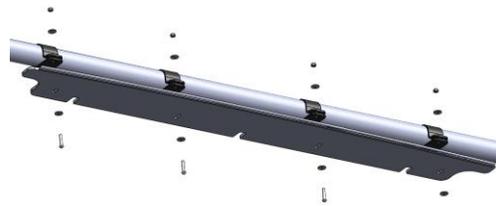



It should look like this when done



5. Place six clamps in the approximate locations shown.




6. Insert the windshield through the side of the vehicle.

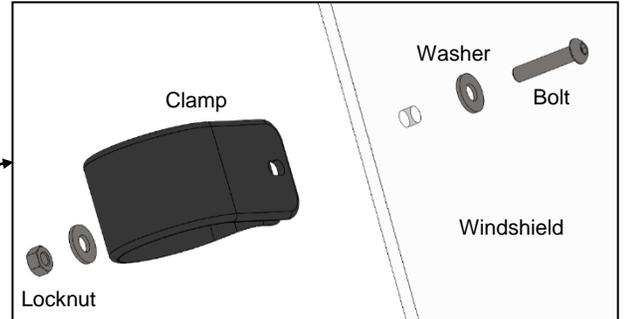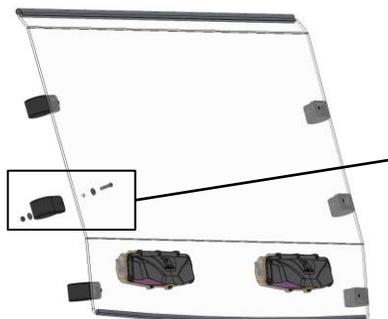


7. Attach the windshield with the included bolt, two washers, and locknut as shown.

VENT OPERATION:

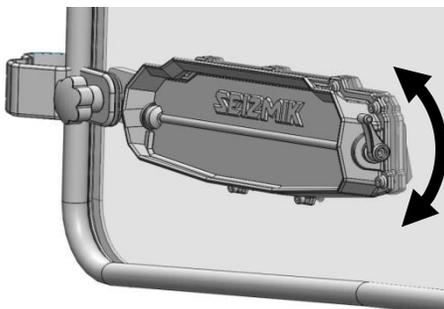

Turn handle to adjust vent. If the vent seems too tight or too loose, it can be adjusted by turning the T10 Torx screw in the handle.

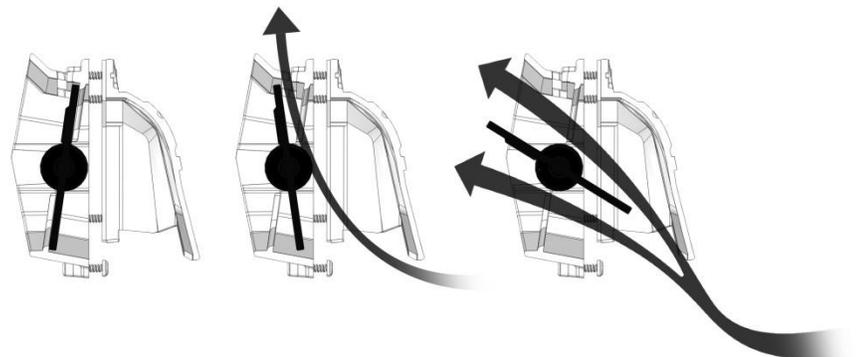

The vent has 3 positions: Closed, Defog, and open.